

## *T75 TRUCK MOUNTED CONCRETE PUMP*

The T75 truck mounted concrete pump has been specifically engineered to increase your productivity and most importantly, your profitability to ensure Jacon is the right partner for you.


The T60 Series comes with an option of 3 different Jacon pumps, providing the client with a range of options to suit their needs. The spraymaster may be used as a shotcrete machine suitable for jobs such as earth stabilisation and retaining walls. The T60 and T75 range in output capacities to provide a variety of concrete pumping services such as footings, concrete slabs, blockfilling, footpaths and driveways.

Containing the superbly engineered "S" valve, the T60 truck mounted concrete pump is capable of handling extremely harsh mixes as well as low slump concrete. With an output ranging from  $45m^3/hr - 75m^3/hr$ , these compact and robust units can be utilised for many applications within the civil industry.


ROBUST AND RELIABLE, THIS MACHINE IS PURPOSE BUILT FOR TROUBLE FREE OPERATION



Specifications subject to change without notice | For further equipment details contact sales@jacon.com.au

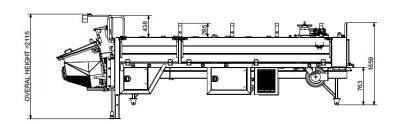

SIDE VIEW

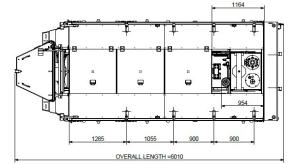

TOP VIEW

## SPECIFICATIONS


|  | SPRAYMASTER   | Т60                                | T75                                   |
|--|---|------------------------------------|---------------------------------------|
| PUMP                                   | 160mm cylinders with 1100mm stroke  | 180mm cylinders with 1100mm stroke | 180mm cylinders with<br>1486mm stroke |
|  | S-Valve, swingtube design concrete transfer valve in<br>hopper All cylinders are hard chromed |                                    |                                       |
| POWER UNIT<br>PTO<br>6 Cylinder Engine | Standard<br>Perkins1006   | Standard<br>Perkins1006            | Standard<br>N/A                       |
| HYDRAULIC PRESSURE MAX                 | 250 Bar   | 250 Bar                            | 250 Bar                               |
| RATED OUTPUT                           | 45 Cubic Metres / Hour  | 60 Cubic Metres / Hour             | 75 Cubic Metres / Hour                |
| LINE PRESSURE MAX                      | 70 Bar  | 70 Bar                             | 70 Bar                                |
| VERTICAL REACH                         | 40 Metres   | 80 Metres                          | 80 Metres                             |
| HORIZONTAL REACH                       | 150 Metres  | 180 Metres                         | 180 Metres                            |

Aggregate size: \*Up to 40mm that falls within the accepted grading curve for pump mix. | Note: \*Performance may vary due to material mix or line set up.

## **FEATURES**

## **OPTIONAL EQUIPMENT**

| Water Pump with Stainless Steel Water Tanks   | Spraying Kit                     |  |
|---|----------------------------------|--|
| Air Blow Out System                           | Standard Pipeline Kit            |  |
| Spot Light on Hopper                          | Blockfill Kit                    |  |
| 4 Channel Remote Control                      | Bathtub style hopper c/w Remixer |  |
| Variable Displacement Piston Pump             | Compressor for Spraymaster       |  |
| Independent Hydraulic Circuit for Auxillaries |                                  |  |
| Mounting to Truck Chassis                     |                                  |  |
| Standard LED Road Lighting                    |                                  |  |
| Drop Down Doors on Side of Unit               |                                  |  |
| High pressure water pump                      |                                  |  |



FRONT VIEW